

# Origins



Origins integrates the past with the present. Adding cork to vulcanized composition rubber, Origins is a durable surface with a timeless design. Inspired by nature, Origins features deep, saturated, and pure colors that are near solids. This premium product is 3.2mm thick and available in 12 inch by 24 inch tiles that can be installed in a brick/ subway or herringbone pattern.

### Markets

- Corporate
- Education
- Retail
- Hospitality
- Healthcare
- Public Buildings
- Senior Care
- Multi-Family

### Applications

- Selectorized Strength
- Free Weights
- Common Areas
- Entrances
- Therapy / Rehab
- Public Spaces
- Childcare / Education
- Corporate Offices


### Benefits

- Durable
- Slip resistant
- Offers better acoustic properties than traditional resilient surfaces
- Endless design options
- Immediately after installation, a field-applied Ecore recommended coating should be applied. Contact your customer service rep for more information.

# Product Information

## Nominal Dimensions:



Available as a standard in tiles. Talk to your local agent to determine availability, pricing, minimums, and lead times.

 Tiles:  
 3.2mm  
 12" (30.5cm) x 24" (61cm)

## Color Options:

[Click here to view colors](#)

## Layout Options:

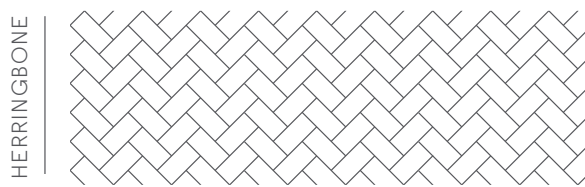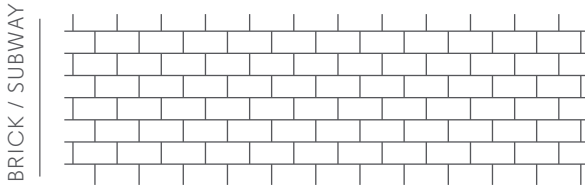


# Technical Details

Performance Criteria	Test Standard	Typical Results
Static Load Limit	ASTM F970	0.005" (@400psi)
Coefficient of Friction	ASTM D2047	> 0.9
Abrasion Resistance	ASTM D3389	<1g
Sustainability	ASTM E2129	Data Collected
Pill Test	ASTM D2859	Pass

\* Tested on a 6" concrete slab with no ceiling.

## THE NRG FACTOR

NRG




2.4%

**Force Reduction**  
Absorption of impact energy


---

NRG




75.5%


**Energy Restitution**  
Useful return of impact energy



Safety



Ergonomics



Acoustics